ELEVATION CERTIFICATE

FEDERAL EMERGENCY MANAGEMENT AGENCY NATIONAL FLOOD INSURANCE PROGRAM

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR).

Instructions for completing this form can be found on the following pages.

		inpieting tills		ie ioliowing pag	jes.
	FOR INSURANCE COMPANY USE				
BUILDING OWNER'S NAME	POLICY NUMBER				
STREET ADDRESS (Including A 2553	COMPANY NAIC NUMBER				
OTHER DESCRIPTION (Lot and	Block Numbers, etc.) 37-040-	05	· ,	*	
WOODL AN		ł		STATE	zip code 95695
	SECTION B FL	OOD INSURA	ANCE RATE MAP (FIRM)	INFORMATION	
Provide the following from	the proper FIRM (See	Instructions):			,
1. COMMUNITY NUMBER 060423	2. PANEL NUMBER	3. SUFFIX	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION (in AO Zones, use depth)
060423	05/5	· D.	12/16/90	<i>H</i>	65.0
B. For Zones A or V, where	no BFE is provided o	n the FIRM, ar	ase Flood Elevations (BFE and the community has estable FIRM datum-see Section	ablished a BFE f	Other (describe on back) or this building site, indicate
	SECTION	ON C BUILDI	NG ELEVATION INFORM	IATION	
of IRM Zones, V1-V30, ne selected diagram, (c). FIRM Zone A (without below (check one (d). FIRM Zone AO. The one) the highest grad level) elevated in acc 3. Indicate the elevation danual comments on Pa	AB, AH, and A (with B et NGVD (or other FIF VE, and V (with BFE) is at an elevation of L BFE). The floor used the highest grade as floor used as the refe e adjacent to the build ordance with the commatum system used in a ge 2). (NOTE: If the B, Item 7], then convents on Page 2.)	RFE). The top RM datum—see The bottom The bottom as the refere diacent to the bottom rence level from ling. If no flood munity's floodp letermining the elevation datule ert the elevation	Section B, Item 7). of the lowest horizontal structure in the selected diagram is discontinuous above reference level elements to the datum system unit the datum system unit the lowest to the datum system unit the lowest in the lowest interval interval in the lowest interval in the lowest interval in the lowest interval	d datum—see S d diagram is feet a e, is the building ce? Yes vations: NG elevations is diffesed on the FIRM	dbove or below (check s's lowest floor (reference No Unknown VD '29 Other (describe
	ction drawings is only only be valid for the bu	valid if the bui uilding during tl	uction construction d lding does not yet have the he course of construction.	e reference leve	
•	,	•	ne building is:	. la feet NGVD	(or other FIRM datum-see
	S	ECTION D C	OMMUNITY INFORMATION	DN	
is not the "lowest floor" floor" as defined by the	as defined in the compordinance/is:	munity's floodp feet	evations specifies that the plain management ordinan NGVD (or other FIRM dat	ce, the elevatior um-see Section	ndicated in Section C, Item 1 of the building's "lowest B, Item 7).
FEIMA Form 81-31, MAY 90		REPLAC	ES ALL PREVIOUS EDITIONS	SEI	E REVERSE SIDE FOR CONTINUATION

REPLACES ALL PREVIOUS EDITIONS

This certification is to be signed by a land surveyor, engineer, or architect who is authorized by state or local law to certify elevation information when the elevation information for Zones A1–A30, AE, AH, A (with BFE),V1–V30,VE, and V (with BFE) is required. Community officials who are authorized by local law or ordinance to provide floodplain management information, may also sign the certification. In the case of Zones AO and A (without a FEMA or community issued BFE), a building official, a property owner, or an owner's representative may also sign the certification.

Reference level diagrams 6, 7 and 8 - Distinguishing Features-If the certifier is unable to certify to breakaway/non-breakaway wall, enclosure size, location of servicing equipment, area use, wall openings, or unfinished area Feature(s), then list the Feature(s) not included in the certification under Comments below. The diagram number, Section C, Item 1, must still be entered.

I certify that the information in Sections B and C on this certificate represents my best efforts to interpret the data available. I understand that any false statement may be punishable by fine or imprisonment under 18 U.S. Code, Section 1001.

LLOYD	$E \cup AC$	SEK	CE 16698	
CERTIFIER'S NAME		LICENSE NUM	MBER (or Allix Seal)	•
CIVIL EN	6IN EER	Y040	ENGINEERS	3
TITLE		COMPANY NAME		
OWNER				
ADDRESS		CITY	ST	ATE ZIF
303 7	HIRD Str.	WOODLAND		a 956
SIGNATURE 5	Seigen	15 PAT	PHONE 662	4346
· · · · · · · · ·				
Copies should be made o	if thus Certificate for: 1) o	community official, 2) insurar	nce agent/company, and 3)	bullaing owner.
COMMENTS:				
			PRO	FESSIONAL
	1.00		- CAD	
				12/18/1
		•	No.	. 16698
			11 1 -	
			//*/ Exb	
			log .	IVIL
	•		E OI	CALIFORM
<u> </u>				
ON	_	WITH	ON PILES,	
SLAB		BASEMENT	PIERS, OR COLUM	INS
A	٧	A		V
ZONES	ZONES	ZONES		NES TAT
REFERENCE		BASE	REFERENCE LEVEL	REFERENCE
LEVEL	Л	FLOOD ELEVATION		LEVEL

The diagrams above illustrate the points at which the elevations should be measured in A Zones and V Zones.

Elevations for all A Zones should be measured at the top of the reference level floor.

Elevations for all V Zones should be measured at the bottom of the lowest horizontal structural member.

CHERNAYAROROX

303 THTRD STREET • WOODLAND, CA 95695 (916) 662-4346 • FAX: (916) 661-1451

January 09, 1995

the second of the second secon

Theo Roth 104 Russell Street Winters, CA 95694

Re: Flood Plain Elevations for Assessor's Parcel 37-040-05,

Yolo County.

Mr. Roth:

On January 05, 1995, our field crew set marks and tacks on the trim near the easterly entrance of the white house on the subject property. The marks and tacks were set at the 100 year flood plain elevation of 65 feet and one foot above at elevation 66 feet, mean sea level (NGVD 1927) datum. The floor elevation of the house is 64.4 feet.


We also set a permanent benchmark at elevation 66 feet in a 16 inch palm which is approximately 45 feet south of the southeasterly corner of the house. This benchmark is a bridge spike driven in the northerly face of the palm tree.

Please call if you have any questions.

Sincerely

Bruce T. Tronoff, LS

9412099.ltr

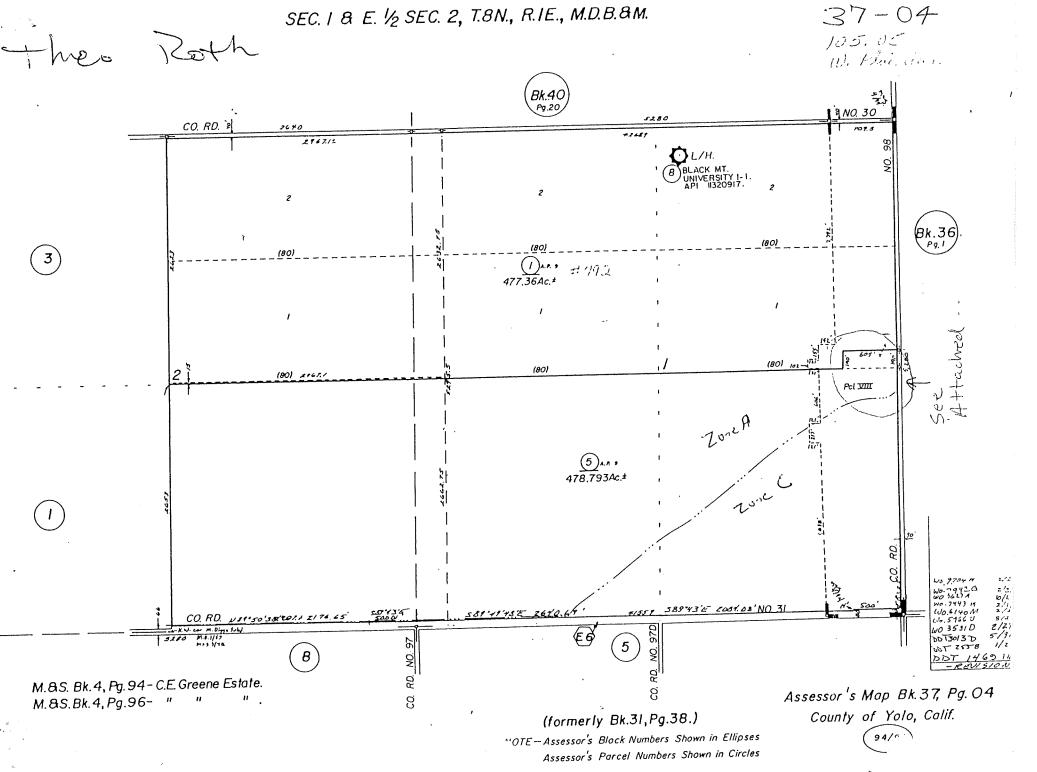

. Onder in Ondes

