LEVATION CERTIFICATE


FEDERAL EMERGENCY MANAGEMENT AGENCY
NATIONAL FLOOD INSURANCE PROGRAM

O.M.B. No. 3067-0077 Expires July 31, 1999

ATTENTION: Use of this certificate does not provide a waiver of the flood insurance purchase requirement. This form is used only to provide elevation information necessary to ensure compliance with applicable community floodplain management ordinances, to determine the proper insurance premium rate, and/or to support a request for a Letter of Map Amendment or Revision (LOMA or LOMR). You are not required to respond to this collection of information unless a valid OMB control number is displayed in the upper right corner of this form.

Instructions for completing this form can be found on the following pages.

	SECTION A PRO	OPERTY INFO	RMATION	. [FOR INSURANCE COMPANY USE
BUILDING OWNER'S NAME				ļ f	POLICY NUMBER
Tom Elliott					·
STREET ADDRESS (Including Ap 37810 Russe	(COMPANY NAIC NUMBER			
OTHER DESCRIPTION (Lot and E					
A.P.N. 37-14	10-09			STATE	ZIP CODE
Davis				CA	95616
Davis	SECTION B FI	OOD INSURA	NCE RATE MAP (FIRM)	······	
Provide the following from the	ne proper FIRM (See	Instructions):			
1. COMMUNITY NUMBER	2. PANEL NUMBER	3. SUFFIX -	4. DATE OF FIRM INDEX	5. FIRM ZONE	6. BASE FLOOD ELEVATION
060423	0575	С	March 23, 1999	Α	(in AO Zones, use depth)
8. For Zones A or V, where	no BFE is provided o	n the FIRM, ar	ase Flood Elevations (BFE and the community has esta FIRM datum-see Section	ablished a BFE to	Other (describe on back) or this building site, indicate
	SECTION	ON C BUILDI	NG ELEVATION INFORM	MATION	
(c). FIRM Zone A (without below (check one) (d). FIRM Zone AO. The cone) the highest grade level) elevated in account ander Comments on Page the FIRM [see Section equation under Comments. Elevation reference marks. The reference level elevation (NOTE: Use of construction)	VE, and V (with BFE) is at an elevation of L BFE). The floor use the highest grade at floor used as the reference adjacent to the build ardance with the compart of the state	a. The bottom of	of the lowest horizontal struction is the lowest horizontal struction is depth number is available lain management ordinant above reference level elements to the datum system used in measuring the elements to the datum system used in measuring the elements in the latest process of construction in the course of construction.	tM datum—see See d diagram is feet at le, is the building' ce? Yes evations: X NGV elevations is differ see on the FIRM See n Page 4) bence rawings rayings A post-construct	ection B, Item 7). L. D feet above \(\) or cove \(\) or below \(\) (check as lowest floor (reference) No \(\) Unknown D '29 \(\) Other (describe) The conversion and show the conversion attached sheets for hmark. Benchmark NGV and is shown on Quad floor in place, in which ion Elevation Certificate
Section B, Item 7).					
			OMMUNITY INFORMATION		
not the "lowest floor" a	s defined in the comporting the comportion is the comportion of the comportion is the comportion in the comportion in the comportion is the comportion in the comportion in the comportion in the comportion is the comportion in th	munity's floodp	lain management ordinan NGVD (or other FIRM dati	ce, the elevation	dicated in Section C, Item 1 of the building's "lowest 3, Item 7).

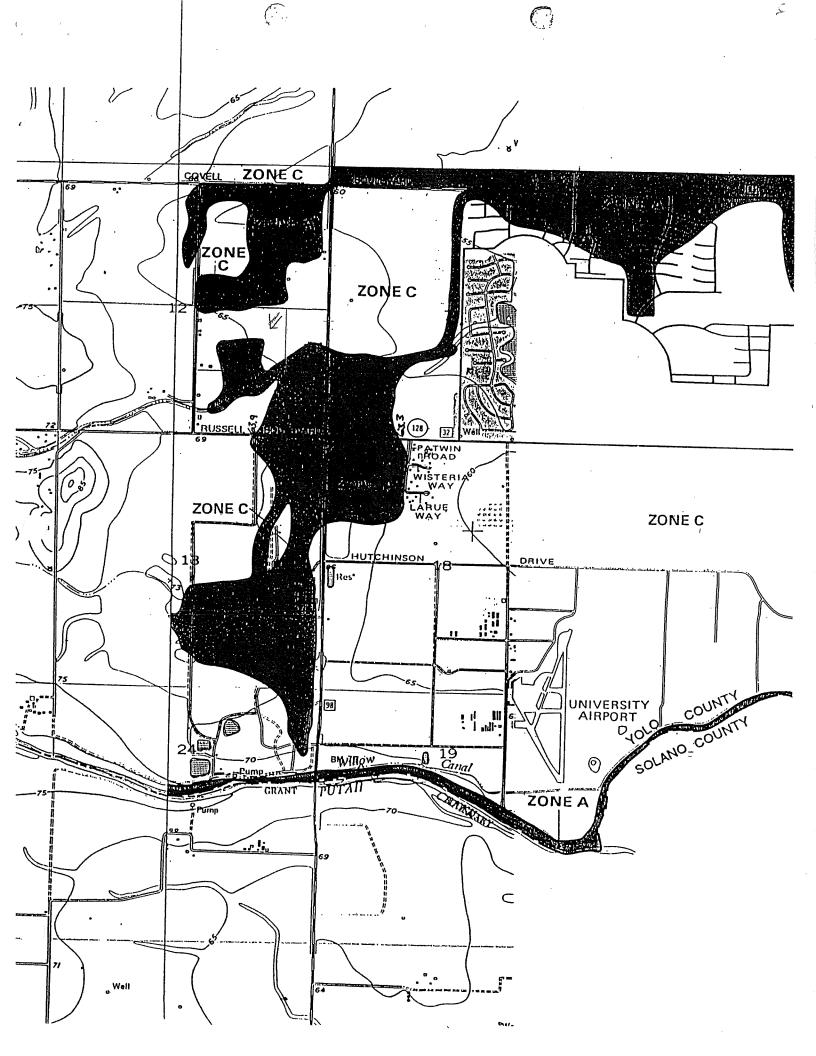

Sec. 15 Desig. N 128 Established:

(s)

Established: USC&GS

Description: At the southeast edge of <u>Davis</u>, Yolo County, on Interstate 80 at the Southern Pacific Co. railroad overpass, in the top of the southwest concrete wing wall, 4 feet west of the slope, and about 3 feet higher than the highway. A standard disk, stamped "38.468 N 128 1932."

Elev. 37.274

Sec. # Found - 1872 by Your Eng - 6

Established: USC&GS

Description: 3.6 miles west along Russell Boulevard from

Davis, Yolo County, at the south end of the triangle
formed by the junction of county roads, 41 feet east of
the intersection of the centerlines, and 2 feet north
of a fence corner. A standard disk, stamped "63.674 S
128 1932" and set in the top of a concrete post projecting 3 inched above ground.

Elev. 63.232

Sec.19
Desig. 74 B
Established: USC



Established: USC&GS

Description: 5.0 miles west and south along Russell Boulevard and Davis, Yolo County, about 900 feet east of Road 98 about 100 feet north of Putah Creek, and in the north face of triangulation station YOLO SOUTHEAST BASE (a granite monument about 10 feet high set on a brick foundation). A United States Geological Survey standard disk, stamped "74.586 74 B 1905" and set vertically.

Elev. 74.022

Sec. 11 Desig. 42 B Established: USGS

Description: Davis, 0.4 mile east of, south side of track, 5 feet from mile post 77; iron post stamped "42 B"

(Not Found, 1952)

LINE 108

5

DATA	> -	
SOL	SURVE	1929
CONTROL	by the GEODETIC	SEALEVEL DATUM OF 1929
/ERTICAL	by the NATIONAL GEODETIC SURVEY	SEALEVER
/ERJ	_	

QUAD 381214 PAGE K. CALIFORNIA LARITUDE 38°30' TO 39°00' LONGITUDE 121°30' TO 122°00' DIAGRAM SACRAMERTO NJ 10-5

LINE 107

	9	1951 F.O. (Feet)	18.586 16.673 14.882	I-17610 1959 S.O. (Feet)	37.231 26.722 37.536 14.895 10.358	13.783 14.610 16.870 DEST. 17.306	<u>ት</u> ኢትርት 14 ት ጅ ሂ ሂ ሂ ያ የ ያ	15.282 DEST. 38.809	38.015 25.754 28.552 28.961 72.882	23.976 35.881 35.889 36.181	37.671 48.166
VERTICAL CONTROL DATA by the NATIONAL GEODETIC SURVEY SEALEVEL DATUM OF 1929		NCE MARK	D 46.1 RESEDT 1968 E 46.1 F 46.1	BENCE MARK	EM (CSE) A 1031 B 1031 C 1031 D 1031	E 1051 PASO AZI PASO BN 1 PASO BN 3	- PASO EM 4 · P 1031 G 1031 H 1031 J 1031 J 1031	E 1031 AP 1968 SEA. A E 557 I 1031 ° FERRI EN 1	FERT EN 2 25.19 (USGS) H 1031 IC 24 (USGS)	N 1051 P 1051 HEBRON RM 1 HEBRON HEBRON RM 2	HERRON AZI Q 1031
		L-21890 1969 F.O. (Feet)	63.232 59.160 DEST. 61.520	54.852 48.458 48.707 37.218	38.573 24.534 35.095 31.365	25.573 22.359 16.696	16.631 35.466 32.825 32.762 32.776	32.877 32.884 32.657 31.197	12.129 15.056 DEST. 1971	17.73 17.533 33.433	36.644 31.975 31.985
		I-21067 1966-67 F.O. (Feet)	63.232 59.134 63.274 62.700	74.852 48.540 48.799 48.615 37.274	38.724 35.266 31.566 392.392	25.761 22.382 16.824	16.657 32.825 32.762 32.776	32.874 32.884 31.279	12.129 15.056 15.768 37.858 38.117	31.903 17.736 17.582	
U.S. DEPARTMENT OF COMMERCE NATIONAL OCEAN SINCEPEDIC ADMINISTRATION NATIONAL OCEAN SINCEY	106 nued)	I-19598 1963-64 F.O. (Zeet)	63.379 63.828 62.828	55.207 48.878 49.203 48.884 37.556	39.019 35.036 35.577 31.788 28.602	24.964 DEST. 25.896 22.484 16.883	16.729 32.897 32.818 32.828	32.920 32.930 DEST. 31.201	12.201 15.118 15.827 37.926 38.189	32.461	36,768 32,054 32,067 32,669 35,200 28,655
	LINE 106 (Continued)	1935-42 S.O. (Feet)	63.589 59.737	50.082 49.678 38.340	36.568	28.379	16.985	32.940			, च
		1932 1932 7.0. (Zeet)	63.635 59.737	50.190 49.764 33.435			16.985	33.015		74.127	37.128 32.333 32.342
		HENCH MARK	S 128 R 128 U 967 T 967 RESET 1969	128 RESET 967 NVIS 1 128	G 644 RESET 1960 J 967 F 644 F 967 G 967	H 967 L 128 E 967 D 644 CASTRO 2 BM 3	K 128 R 1199 K ' D 967 C 967 J 128 RESET 1962	B 967 E 644 RESET 1962 H 128 H 128 RESET 1969 A 967 (CDH)	z 966 z 966 t 966 t1.50 (b/r) sr/ 1 (b/r)	TIDE STAFF 35' V 966 RESET 1966 F 966 RESET 1966 F 128 RI (USED) RESET 1964	TIME 5 TIME 5 TIME 4 (USE) SES 2 (DAR) SES 1 (DAR) TIME STAFF 29

PYYL INAUKAU